# PLATA P

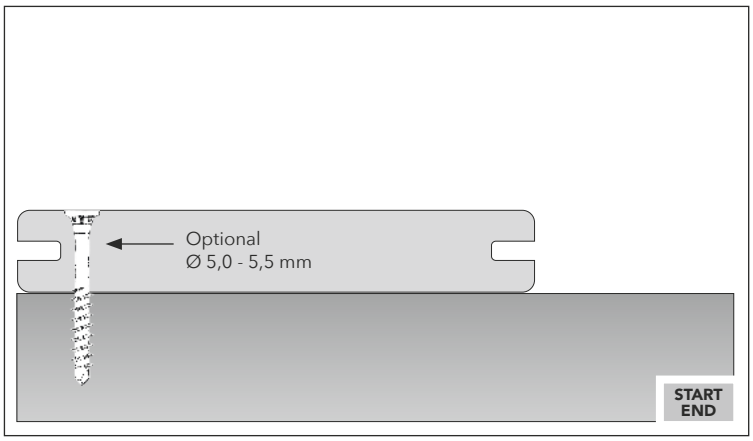


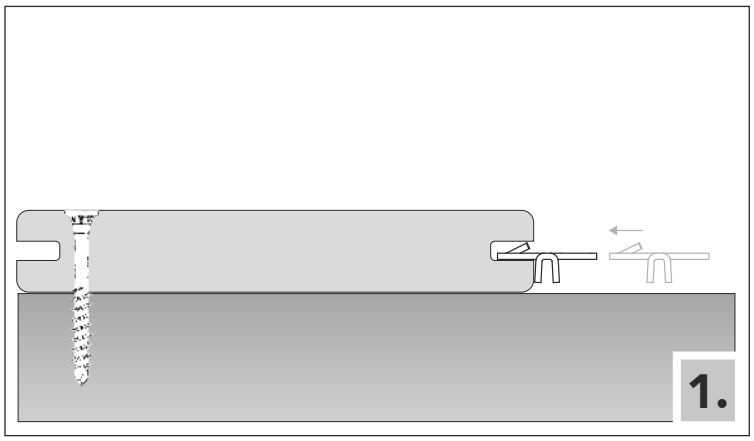


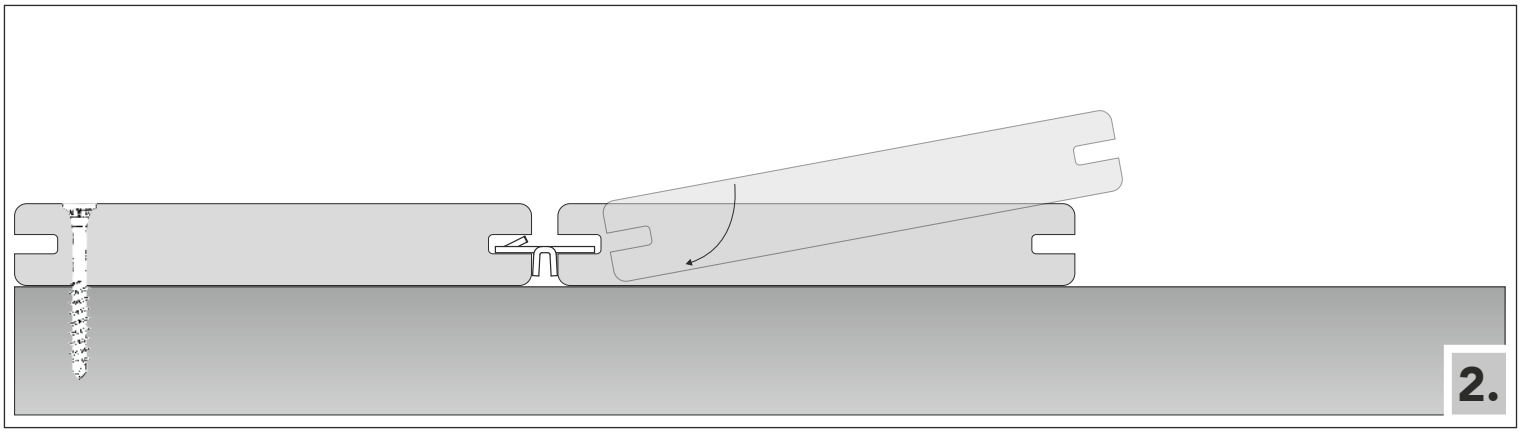


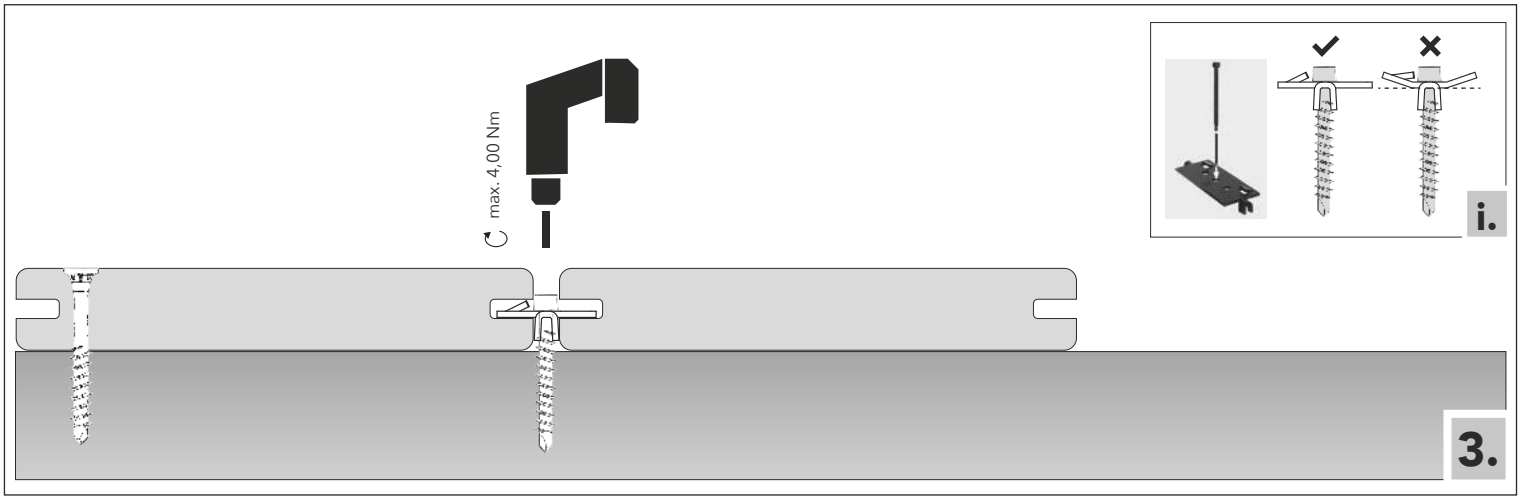


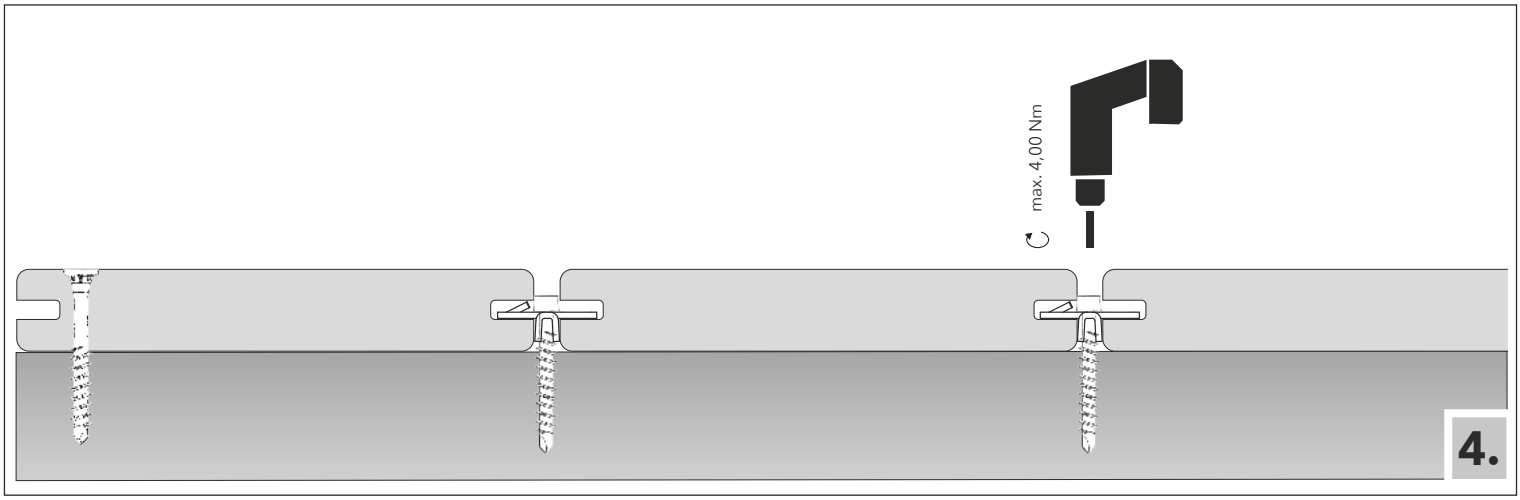

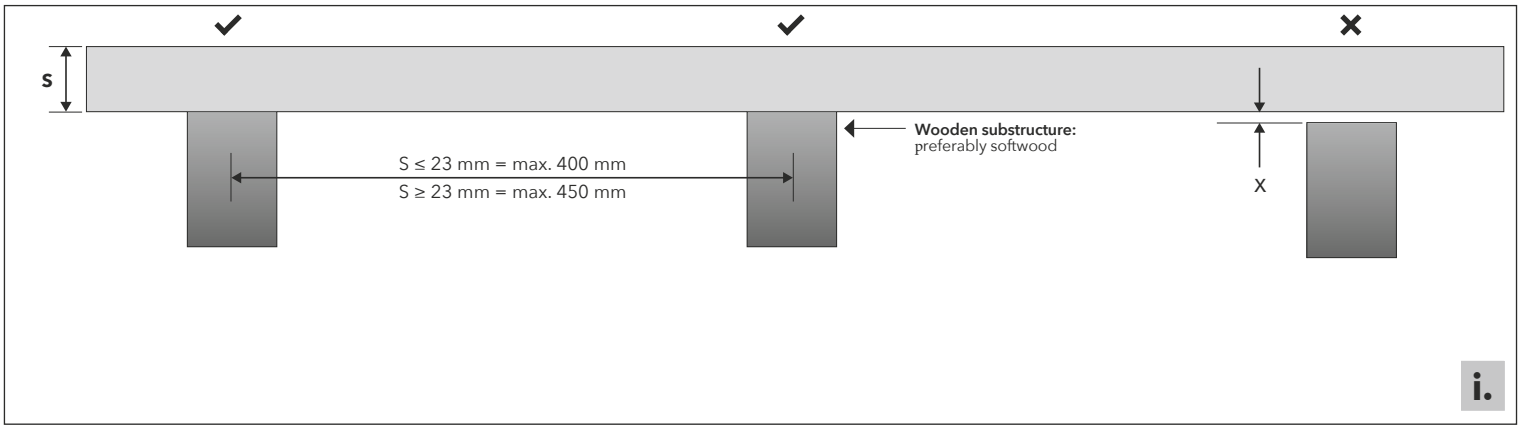
S
S ≤ 23 mm = max. 400 mm
S ≥ 23 mm = max. 450 mm
Wooden substructure:
preferably softwood
X
i.

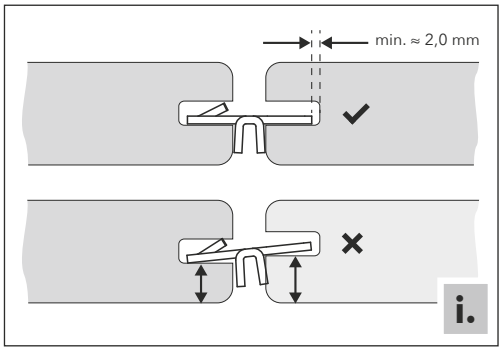
min. ≈ 2,0 mm
i.

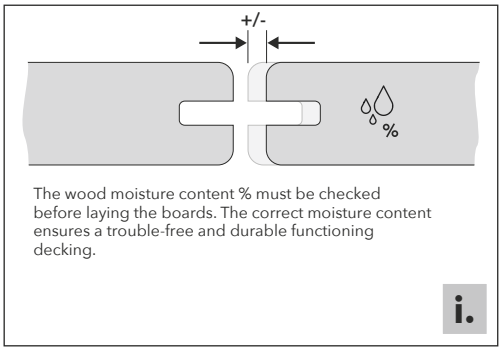
+/-
%
The wood moisture content % must be checked before laying the boards. The correct moisture content ensures a trouble-free and durable functioning decking.
i.

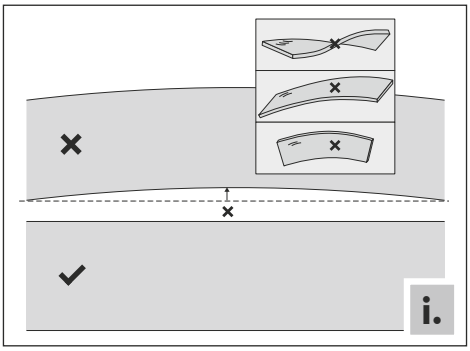
i.

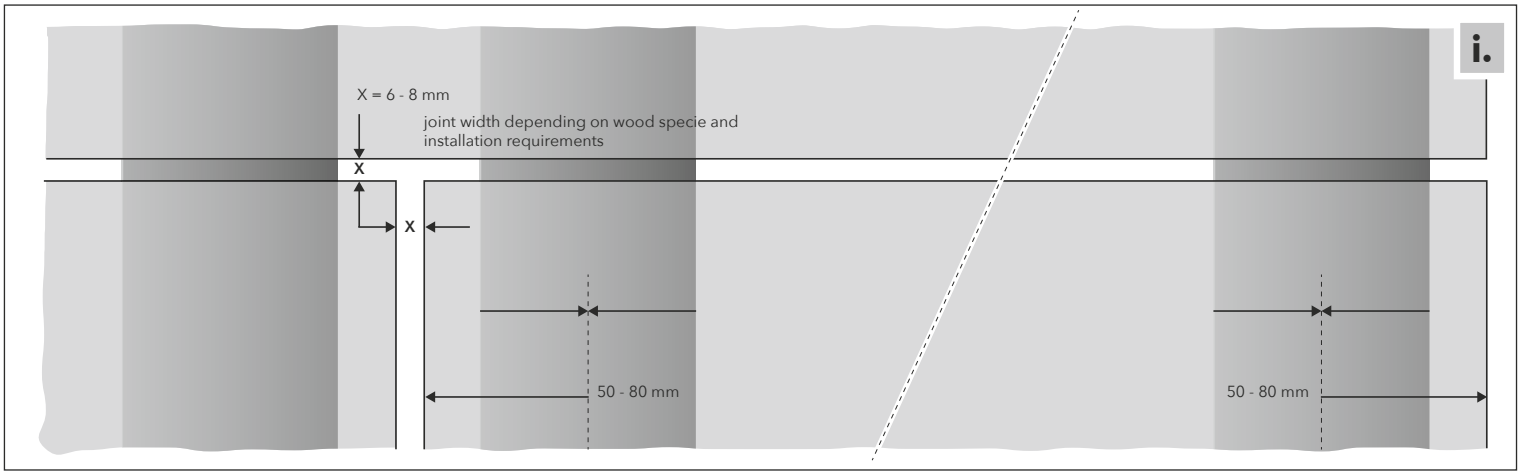
i.
X = 6 - 8 mm
joint width depending on wood specie and installation requirements
X
X
50 - 80 mm
50 - 80 mm

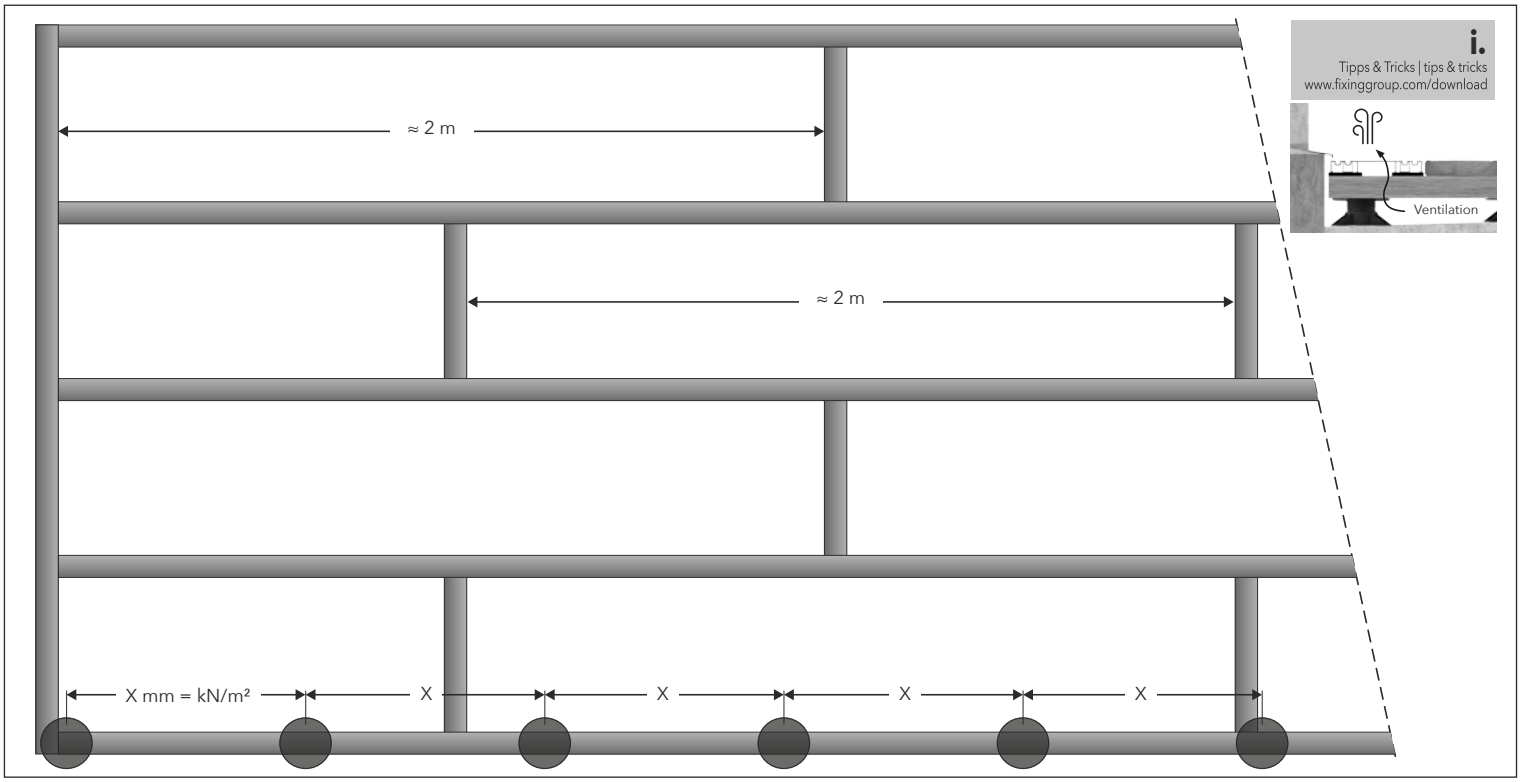
≈ 2 m
≈ 2 m
X mm = kN/m²
X
X
X
X
i.
Tipps & Tricks | tips & tricks
www.fixinggroup.com/download
Ventilation